


Swecoin TTP 5250 Kiosk Printers

SWECOIN

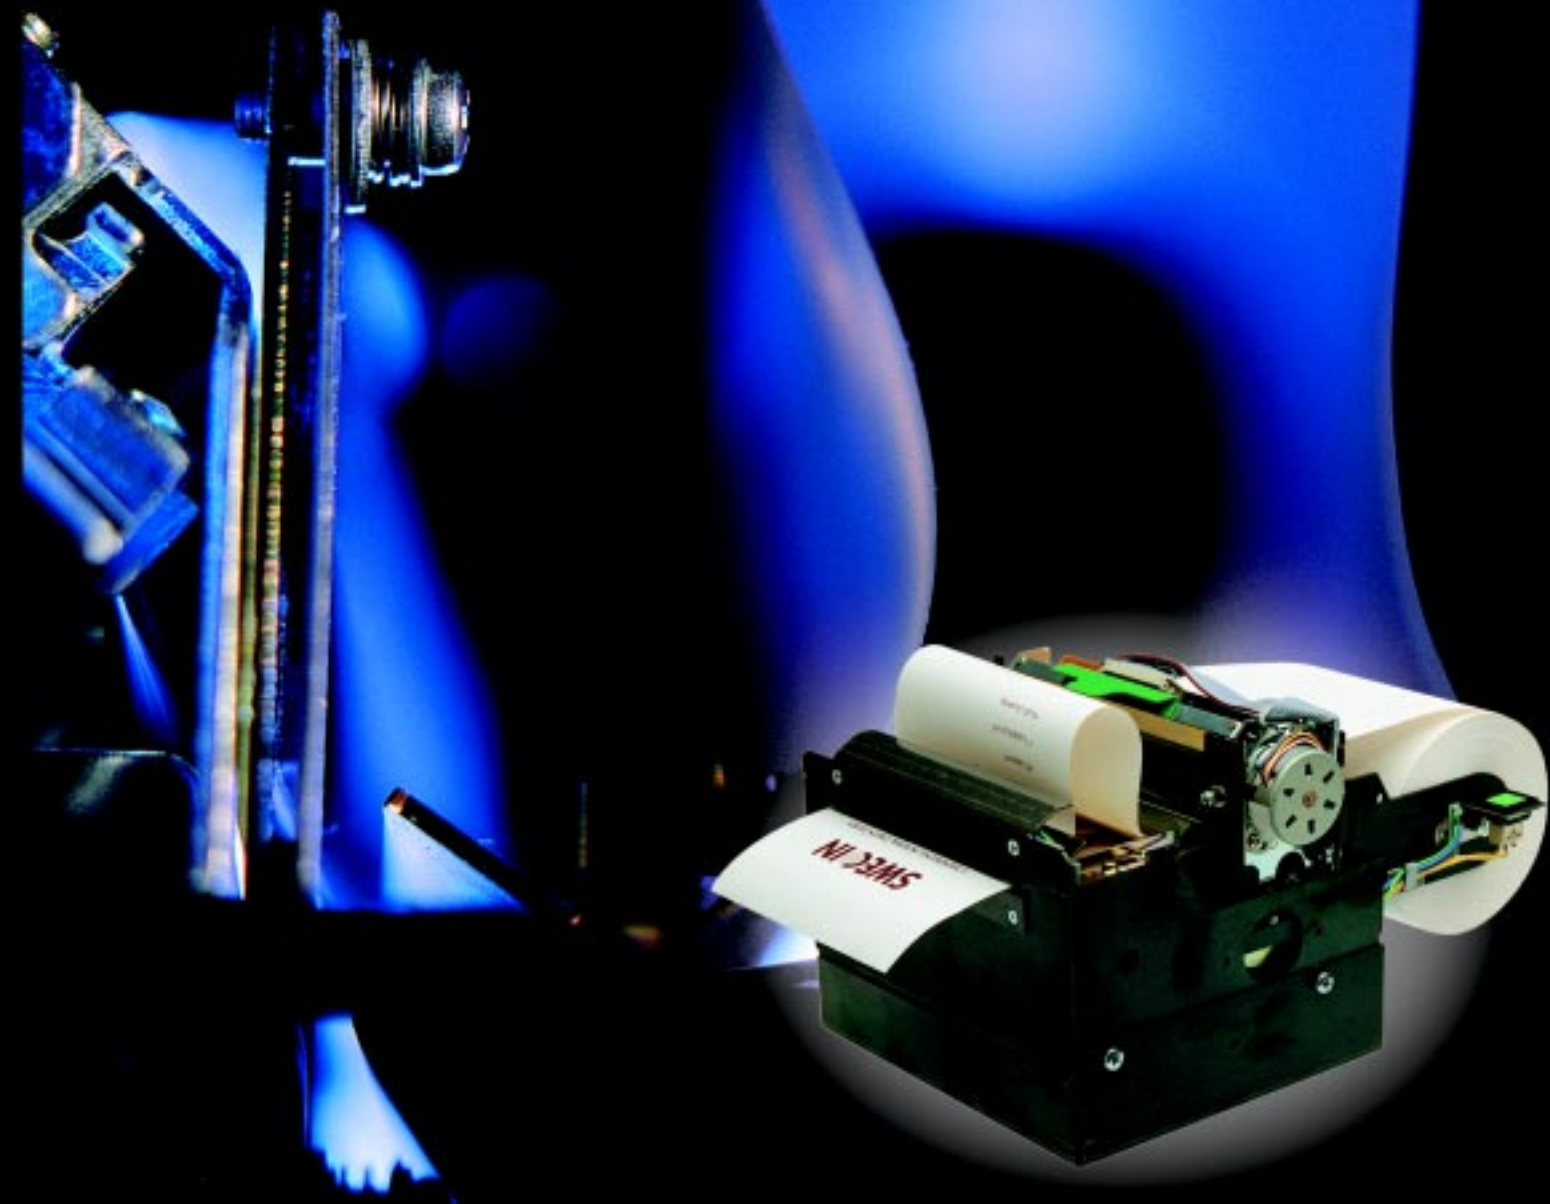


The wide range of TTP kiosk printers offers, fast, reliable and quiet printing, paper separation and presentation of documents for various types of self-service terminals.

A unique, patented presenter mechanism with paper jam sensor protects the document during printout and separation. The presenter handles documents of varying length, controlled by software commands. The TTP 5250 range of printers have flash PROM for downloading of firmware, fonts, default parameters, and logotypes.

Technical data

Printer control	Single-byte commands and ESC sequences, MS Windows and Linux drivers.
Print method	Direct thermal line-print.
Resolution	8 dots/mm.
Print speed	up to 50 mm/second.
Line spacing	Software programmable.
Font attributes	Normal (default), double width, double and multiple height, reversed (white on black), portrait and landscape.
Font	Four standard and four user defined. Printable in both portrait and landscape orientation.
Character set	IBM character set II.
Graphics	Full width bitmap graphics.
Bar codes	EAN 8/13 upc-A, 2/5 interleaved, and Code 39.
Interface	RS 232 serial and Centronics parallel (SPP).
Roll size	135 mm roll holder included. Max 200 mm.
Paper control	Paper-end sensor, paper-near-end sensor, optional weekend sensor.
Paper separation	Full cut.
Presenter	Programmable eject-length after cut. Paper jam detection.
Power supply	24 VDC + 5%, average 2.3 A, peak 6.3 A.
Environmental	+5 – +40°C, 35 –75% rel. humidity, non-condensing.
Life expectancy/MTBF	Printhead: more than 45 km paper. 150 million pulse-lines. Cutter: 500 000 cuts. Control board: 40 000 hours. MTBF: 250 000 tickets (typical).

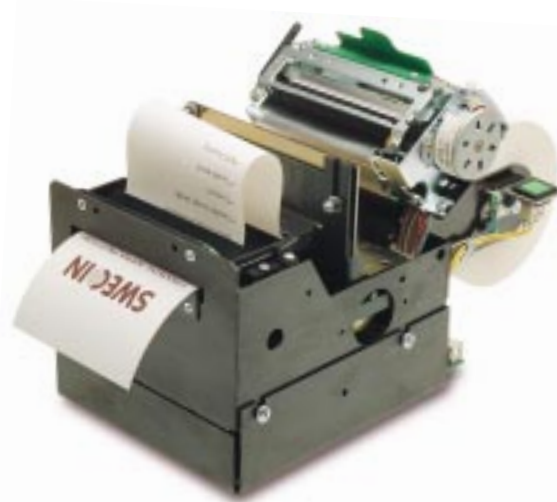

Applications in use

- ATMs
- Information terminals
- Internet kiosks
- Gas pump terminals
- Vending machines
- Ticket terminals
- Currency exchange machines
- Gaming and lottery machines
- Parking
- Tolls

	TTP5250/60	TTP5250/80	TTP5250/112
Paper width	60 mm	80 mm	112 mm
Print width	56 mm (448 dots)	72 mm (576 dots)	104 mm (832dots)
Characters/line	28	36	52
Bit map graphics	8 x 8 dots/mm	8 x 8 dots/mm	8 x 8 dots/mm
Dim. without roll holder (W x H x D mm)	130 x 147 x 166	138 x 147 x 166	170 x 147 x 166
Dim. with roll holder and max. roll diameter (W x H x D mm)	130 x 147 x 288	138 x 147 x 288	170 x 147 x 288
Weight, without paper roll	2300 g	2400 g	2850 g